


Radial Mud-Terrain T/A®

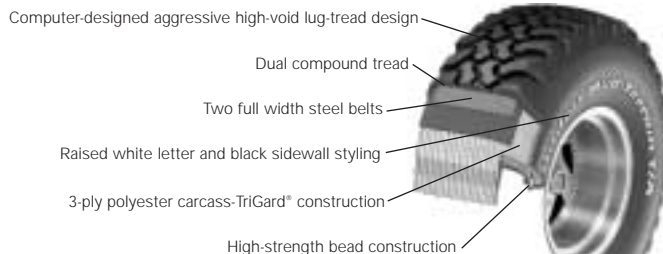

T/A Denotes a Traction/Advantage Benefit

Tire Size	Serv. Desc.	Sidewall	MSPN	Stock #	Rim Width Range (inches)	*Section Width on Measuring Rim Width**	*Overall Diameter	Tread Depth (in/32nds)	Revs/Mile at 45 mph	Max Load Single (lbs@psi)
LT215/75R15/C	100Q	RWL	35082	436-120	5.5 - 7.0	8.5 on 6.0	27.9	17.0	746	1765@50
LT235/75R15/C	104Q	RWL	09758	436-127	6.0 - 7.0	9.3 on 6.5	29.1	18.0	715	1985@50
LT325/60R15/C	106Q	RWL	74338	436-286	9.0 - 11.0	12.8 on 9.5	30.6	19.0	680	2095@35
LT225/75R16/D	110Q	RWL	18942	436-121	6.0 - 7.0	8.9 on 6.0	29.5	17.0	705	2335@65
LT235/85R16/E	120Q	RWL	35658	436-166	6.0 - 7.0	9.3 on 6.5	32.0	18.0	650	3042@80
LT245/75R16/E	120Q	RWL	22090	436-139	6.5 - 7.5	10.1 on 7.0	30.6	18.0	680	3042@80
LT255/85R16/D	119Q	RWL	31820	436-198	6.5 - 8.0	10.5 on 7.0	33.3	18.0	625	3000@65
LT265/75R16/D	120Q	RWL	12552	436-167	7.0 - 8.0	10.7 on 7.5	31.7	18.0	656	3042@65
LT285/75R16/D	121Q	RWL	23006	436-185	7.5 - 9.0	11.8 on 8.0	33.0	19.0	630	3305@65
30x9.50R15LT/C	104Q	RWL	11894	436-890	6.5 - 8.5	9.8 on 7.5	29.9	19.0	696	1990@50
31x10.50R15LT/C	109Q	RWL	14172	436-895	7.0 - 9.0	10.9 on 8.5	30.9	19.0	673	2250@50
32x11.50R15LT/C	113Q	RWL	08054	436-924	8.0 - 10.0	11.8 on 9.0	31.9	21.0	652	2530@50
33x9.50R15LT/C	112Q	RWL	33780	436-938	6.5 - 8.5	9.9 on 7.5	32.8	19.0	634	2510@50
33x12.50R15LT/C	108Q	RWL	13338	436-943	8.5 - 11.0	12.8 on 10.0	32.9	21.0	632	2225@35
35x12.50R15LT/C	113Q	RWL	39492	436-972	8.5 - 11.0	13.1 on 10.0	34.9	21.0	596	2555@35
31x10.50R16.5LT/D	116Q	RWL	27990	436-898	8.25 only	10.7 on 8.25	30.9	19.0	673	2745@65
33x12.50R16.5LT/D	118Q	RWL	04844	436-947	8.25,9.75,10.5	12.6 on 9.75	33.0	21.0	630	2930@50
35x12.50R16.5LT/D	123Q	RWL	23498	436-974	8.25,9.75,10.5	13.0 on 9.75	35.0	21.0	594	3385@50

*The dimensions shown are average values for tires measured on the measuring rim width. Individual tires may vary from data shown.
 **Section width varies approximately 0.2" (5mm) for every 0.5" change in rim width.

Note: Use only on rims designated by the rim manufacturer as suitable for radial tires.

#DANGER: Never mount a 16" diameter tire on a 16.5" rim.

#WARNING: Serious or fatal injury may result from: Tire failure due to underinflation/overloading – follow owner's manual or tire placard in vehicle. Explosion of tire/rim assembly due to improper mounting. Never inflate beyond 40 psi to seat beads. Only specially trained persons should mount tires. Mixing bias tires with radials on the same vehicle. Mixing different tire sizes. Follow manufacturer's recommendations.

Estimated data subject to change for all sizes.